


275/K12RM 900

REMOVABLE ANTITERRORISM BOLLARDS


The removable bollard 275/K12RM 900 are typically used to prevent the parking , transit and access of unauthorized vehicles in sensible sites. It is advised that the removable bollard is used only if the amount of daily movements is limited (if not, the automatic version should be used) or when the depth of installation does not allow for the installation of the automatic bollards.

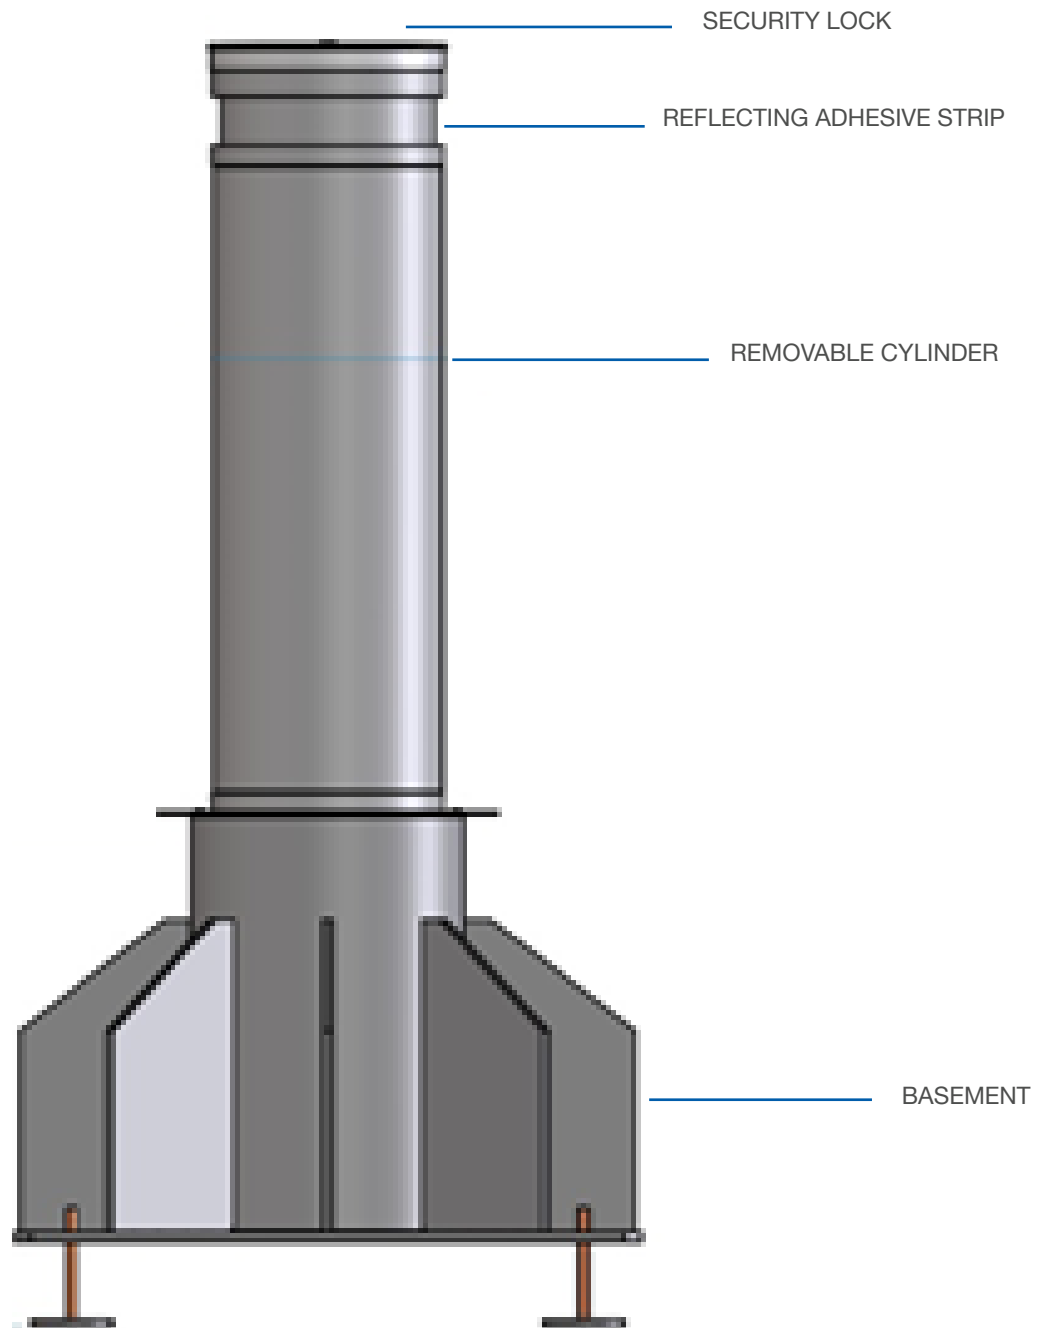

275/K12RM 900

AVAILABLE ITEMS

REMOVABLE BOLLARD 275/K12RM 900FEV – NORMAL STEEL PAINTED equipped with 2 standard keys
REMOVABLE BOLLARD 275/K12RM 900IXV – STAINLESS STEEL PAINTED equipped with 2 standard keys
REMOVABLE BOLLARD 275/K12RM 900IXS – STAINLESS STEEL BRUSHED equipped with 2 standard keys
NORMAL STEEL PAINTED BASEMENT TO BE FIXED INTO THE GROUND
CROWN DEVICE FOR BASEMENT
CYLINDER PAINTING IN ANY RAL COLOR
SECURITY LOCK WITH IDENTICAL KEYS
ADDITIONAL SECURITY KEY FOR REMOVABLE BOLLARD

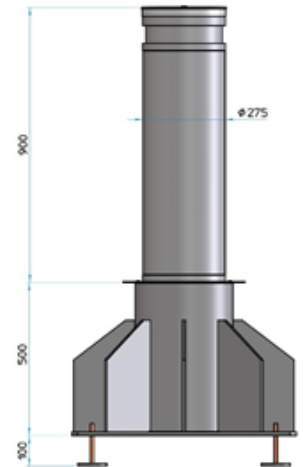

REMOVABLE CYLINDER MATERIAL	FE 370 NORMAL STEEL - AISI 304 STAINLESS STEEL
REMOVABLE CYLINDER DIAMETER REMOVABLE	275mm
REMOVABLE CYLINDER HEIGHT	900mm
REMOVABLE CYLINDER THICKNESS	25mm
REMOVABLE CYLINDER STEEL FINISH	ANTI-CORROSION TREATMENT - GREY ANTHRACITE STANDARD PAINTING
REMOVABLE CYLINDER STAINLESS STEEL FINISH	AS ABOVE OR BRUSHING
REFLECTING ADHESIVE STRIP	INCLUDED IN THE SUPPLY - HEIGHT 55mm
IMPACT RESISTANCE (WITHOUT DEFORMATION)	700.000 J
BREAKOUT RESISTANCE	2.000.000 J
SECURITY LOCK	YES - WITH 2 KEYS

