# RM275-600

## **REMOVABLE BOLLARDS**

The removable bollard 275/RM 600 are typically used to prevent the parking of unauthorized vehicles, transit and access by unauthorized vehicles in driveways, and protection of shatter-proof windows. Because of the procedure of parking, it is advised that the removable bollard be used only if the amount of daily movements is limited (if not, the automatic bollard should be used) or when the depth of installation does not allow for the installation of the automatic bollard.





PAG.1/2

### Ontario Bollards Inc

USA: 300 International Drive, Suite 100 PMB10086, Williamsville, New York, 14221 Canada: 53 Armstrong Ave, Unit 4, Georgetown, Ontario, LTG 451 TOll Free: 844-891-8559, Local: 289-891-8559, Fax: 905-248-3629

275/RM 600\_DATASHEET.16 REVIEW 16/11/2016

# RM275-600

## **OPTIONAL ITEMS**

REMOVABLE BOLLARD 275/RM 600FEV - NORMAL STEEL PAINTED equipped with 2 standard keys

REMOVABLE BOLLARD 275/RM 600IXS - STAINLESS STEEL BRUSHED equipped with 2 standard keys

ADHESIVE REFLECTING STRIP - WHITE (NO LOGO)


PAINTING WITH RAL COLOUR ON REQUEST

SECURITY LOCK - 2 KEYS


SECURITY LOCK WITH IDENTICAL KEYS

ADDITIONAL STANDARD KEY FOR REMOVABLE BOLLARD

ADDITIONAL SECURITY KEY FOR REMOVABLE BOLLARD



| REMOVABLE CYLINDER                           | NORMAL STEEL FE370 - AISI 304 STAINLESS STEEL                |
|----------------------------------------------|--------------------------------------------------------------|
| REMOVABLE CYLINDER DIAMETER                  | 275mm                                                        |
| REMOVABLE CYLINDER HEIGHT                    | 600mm                                                        |
| REMOVABLE CYLINDER NORMAL STEEL THICKNESS    | 5mm                                                          |
| REMOVABLE CYLINDER STAINLESS STEEL THICKNESS | 5mm                                                          |
| REMOVABLE CYLINDER NORMAL STEEL FINISH       | ANTI-CORROSION TREATMENT - STANDARD PAINTING GREY ANTHRACITE |
| REMOVABLE CYLINDER STAINLESS STEEL FINISH    | AS ABOVE OR BRUSHED                                          |
| REFLECTING ADHESIVE STRIP                    | INCLUDED IN THE SUPPLY - HEIGHT 55mm                         |
| IMPACT RESISTANCE (WITHOUT DEFORMATION)      | 40.000 J                                                     |
| BREAKOUT RESISTANCE                          | 200.000 J                                                    |
| OPERATING TEMPERATURE                        | -40 °C +60 °C                                                |

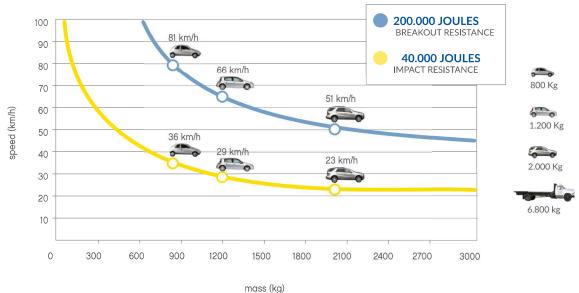



PAG.2/2

### Ontario Bollards Inc.

USA: 300 International Drive, Suite 100 PMB10086, Williamsville, New York, 1422 Canada: S3 Armstrong Ave, Unit 4, Georgetown, Ontario, L7G 4S1 Toll Free: 844-891-8559, Local: 289-891-8559, Fax: 905-248-3629 www.ontariobollards.com

275/RM 600 DATASHEET.16 REVIEW 16/11/2016