

# Mobile vehicle blockers




ättaGard™

Product description		
Removable cylinder	Dimensions of the base plate (W x H x D)	800 x 40 x 924 mm
	Height	1250 mm
	Diameter	273 mm
	Material thickness	16 mm
	Material	Steel S355JR
	Cylinder infill	Concrete
	Surface treatment	Galvanized - painted Anthracite Grey
	Weight	Approx. 350 kg
	Reflecting strips (height 55 mm)	Yes
	Impact energy with destruction - breakout resistance	574,482 J
Conforming to	ASTM PU 30 / 40 / 50	
Transport aid for lifting	Internal lift point (remove head first)	


ättaGard and ättaGard connection are Patent Pending

ättaGard™ is a trademark of Ontario Bollards Inc.


attagard single unit

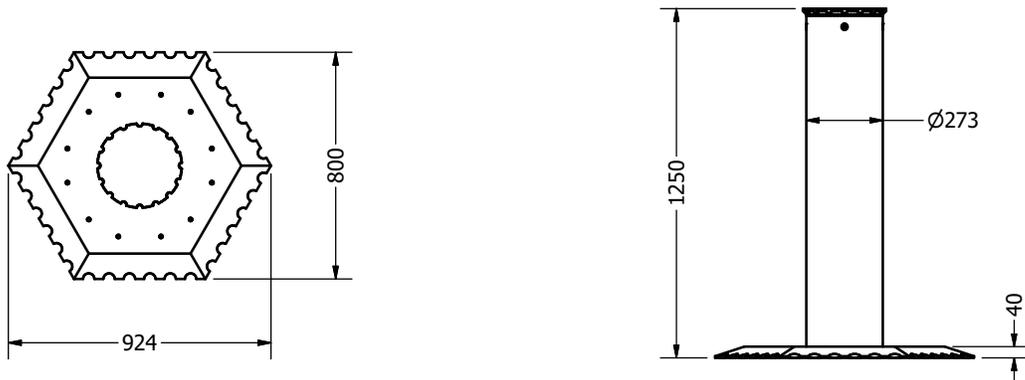

attagard multi units / connector plate

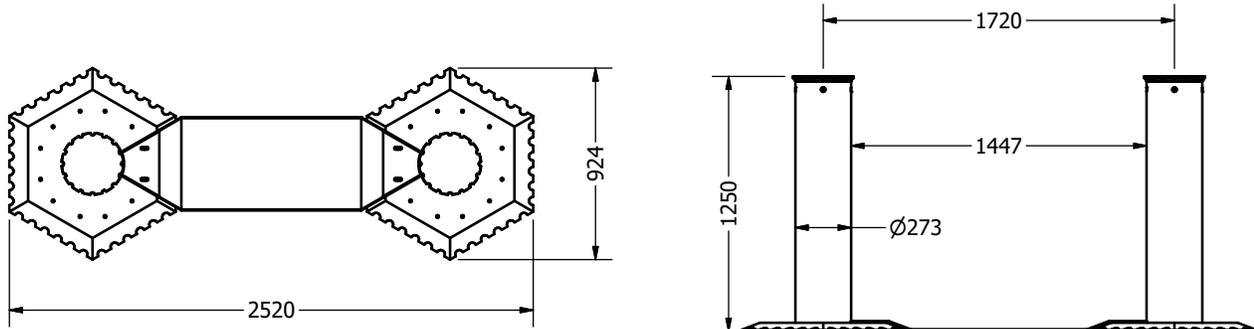


## Mobile vehicle barrier - ättaGard

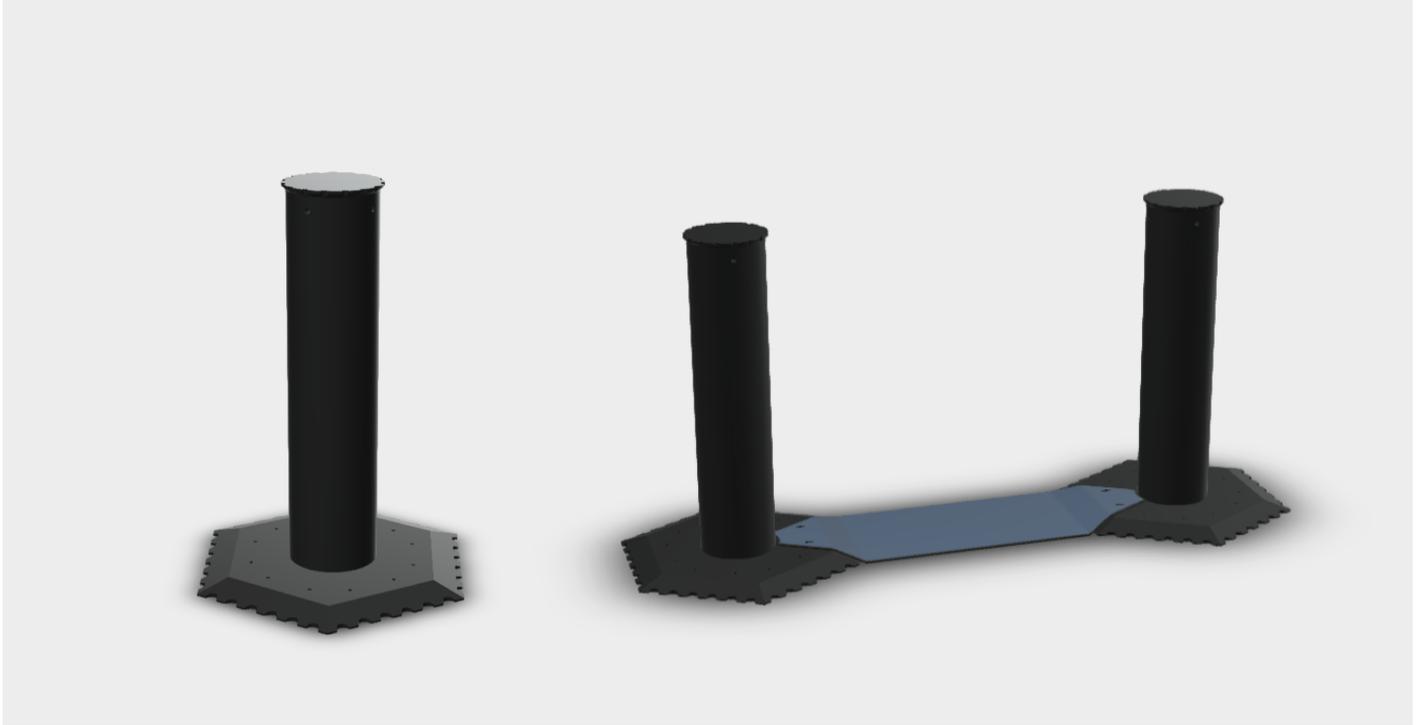


### Arrangement variants

The ättaGard bollards can be arranged individually, in rows, offset or connected. As a result, individual protection concepts can be implemented that are tailored to your specific requirements. In addition, the bollards provide unobstructed escape routes at all times without impairing visibility.


ättaGard is equally suitable for narrow streets and pavements or bike paths, which can often be effectively secured with just one module according to standards. Barriers with unlimited width are possible, as well as a sluice arrangement or defined passage points for emergency and rescue vehicles.

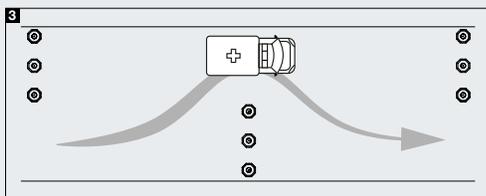


Deflector sluice can be passed by authorised vehicles



Blocker for narrow streets and inner cities

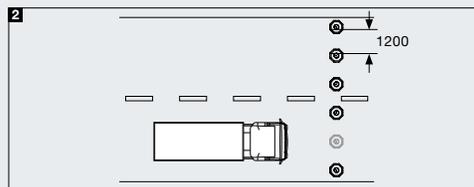

Blocker with unlimited width enabling the quick and easy set-up of passage points for authorised vehicles

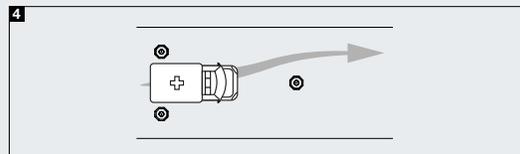

V-slucice can be passed by authorised vehicles